




# VapourTX<sup>®</sup>

## 116 VCL CONSEAL

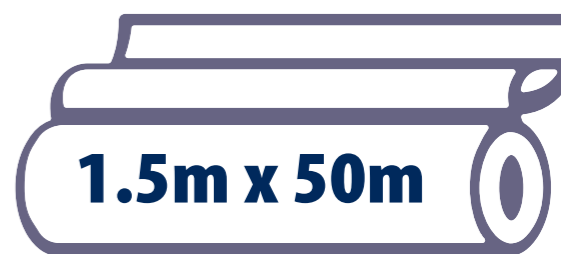

### Air and Vapour Control Layer

- To be installed on the internal (warm) side of the installation
- Forms a barrier against air leakage and water vapour transfer
- It is used in a range of construction applications, including walls, ceilings, floors, pitched roofing and low-sloping metal roofing.
- Fabric weight: 116g/m<sup>2</sup>
- Conseal Integral Tape for sealing laps, reducing air infiltration and convective heat loss
- Single Integral Tape allows ease of use with pressure-sensitive adhesive giving excellent adhesion and quick hold.

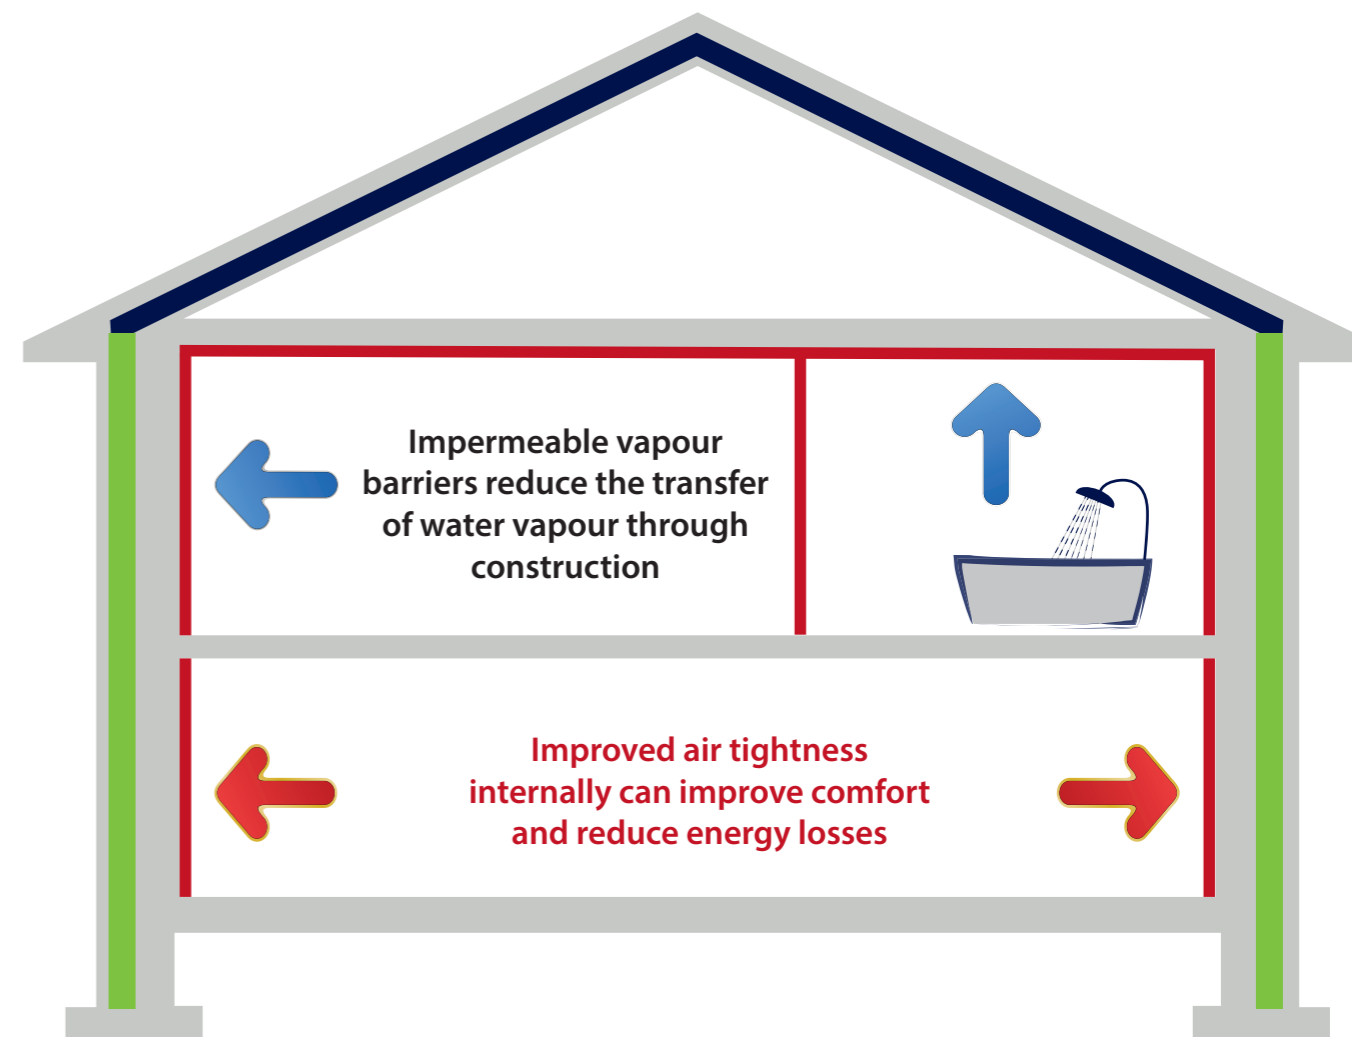

UK  
CA

C E



Installation Guidelines  
[www.donlow.co.uk/install](http://www.donlow.co.uk/install)



**Don & Low Ltd,**  
Newfordpark House Glamis Road, Forfar, Angus, DD8 1FR, Scotland, UK  
Tel: +44(0)1307 452200 Fax: +44 (0)1307 452201 email: [enquiries@donlow.co.uk](mailto:enquiries@donlow.co.uk)  
[www.donlow.co.uk](http://www.donlow.co.uk)



**Code: 969**  
**Issue 02**  
**January 2024**