

Don & Low Roofing Accessories

Eaves

Dry Fix

Roof Vents

GRP



This brand-new range of roofing accessories is the ideal complement to **Don & Low**'s renowned roofing membrane family. Engineered to provide seamless compatibility and total confidence on every project, **Don & Low Roofing Accessories** are made with serious attention to detail for the needs of modern construction. With **Don & Low**, peak performance for your roof is guaranteed from start to finish.



All plastic products are made in the UK.



All products are covered by 15 year Durability Warranty. T&Cs apply.





Eaves

Eaves Protector Underlay Support Tray
Over Fascia Vents
Soffit Vents
Eaves Comb (Birds Comb)
Roll Out Rafter Trays
Rafter Trays

FUN FACT!

Don & Low has been actively supporting the nation's economy since 1792. Yes, that's almost 100 years before the lightbulb was invented!





Eaves Protector Underlay Support Tray

The Underlay Support Tray is a UV stable application to prevent the exposure of the roofing underlay at the eaves. As most underlays are not UV stable, long term exposure can cause degradation and increase the risk of water ingress into the roof structure. Underlay Support Trays prevent the underlay from sagging behind the fascia board and also the accumulation of ponding water, eliminating the need to install traditional timber tilting fillets.

Available in black, in 1.5m length




Product Code	Product	Pcs / Carton	Cartons / Pallet	Weight / Unit
DL1UST	Underlay Support Tray 1.5m	20	50	855g

Over Fascia Vents

The Don & Low 10,000mm² and 25,000mm² Over Fascia Vents are designed to be unobtrusive, fitted to the top of the fascia while allowing a positive airflow into pitched roof spaces with ease between the felt and fascia boards, in accordance with BS5250. Suitable for both new builds and re-roofing projects. The 25,000mm² Over Fascia Vent can also be fitted in a flat roof to wall abutment detail. Both are comprised of small, evenly spaced air vents to prevent rodents and large insects from entering.

Available in black, in 10mm and 25mm width

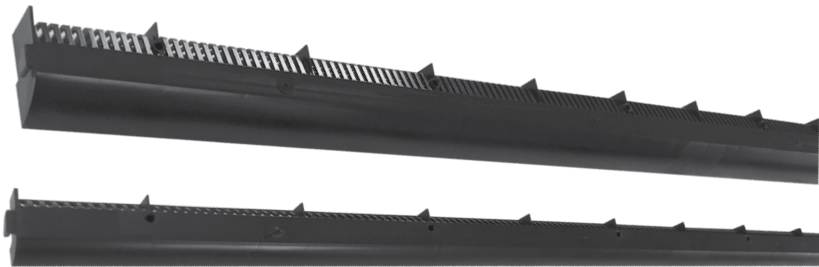

Product Code	Product	Pcs / Carton	Cartons / Pallet	Weight / Unit
DL1FV10	Fascia Vent 1m x 10mm	60	28	97g
DL1FV25	Fascia Vent 1m x 25mm	20	28	157g



Soffit Vents

Soffit vents are an important part of the roofing ventilation system, ensuring a healthy and efficient loft space. These simple to install products provide effective eaves ventilation for both new builds and re-roofing projects, achieving compliance with BS5250.

Available in black, white and brown



Product Code	Product	Pcs / Carton	Cartons / Pallet	Weight / Unit
DL1CSVWH	Circular Soffit Vent White	400	28	11g
DL1CSVBR	Circular Soffit Vent Brown	400	28	11g
DL1CSVBL	Circular Soffit Vent Black	400	28	11g

Eaves Comb (Bird Comb)

The Don & Low Eaves Comb (Bird Comb) is used to prevent birds and vermin from entering the batten cavity, while allowing airflow. It is suitable for profiled roof tiles.

Available in black, in 1m length



Product Code	Product	Pcs / Carton	Cartons / Pallet	Weight / Unit
DL1EC	Eaves Comb 1m	150	28	87g



Roll Out Rafter Trays

Roll Out Rafter Trays are a simple and effective way of preventing loft insulation from being pushed up to the underside of the roofing underlay, commonly blocking ventilation paths. Using Roll Out Rafter Trays will ensure a clear ventilation path into the roof void from the eaves to comply to BS5250. The width of the rafter trays must be chosen based on the thickness of the insulation being installed. They can be overlapped if different widths are required.

Available in black, in 5 widths



Product Code	Product	Pcs / Carton	Cartons / Pallet	Weight / Unit
DL1RORT300	Roll Out rafter Tray 6m x 300mm	10	42	700g
DL1RORT400	Roll Out rafter Tray 6m x 400mm	10	30	875g
DL1RORT600	Roll Out rafter Tray 6m x 600mm	5	42	1400g
DL1RORT800	Roll Out rafter Tray 6m x 800mm	5	32	1750g
DL1RORT1000	Roll Out rafter Tray 6m x 1000mm	5	24	2190g

Rafter Trays

Don & Low Rafter Trays prevent insulation material from blocking the ventilation path. Offered in two widths to accommodate 600mm (24”) or 450mm (18”) rafter centres, this product not only ventilates the roof space but also serves as an effective insect barrier, making it ideal for open soffit installations.

Available in black, in 450mm and 600mm width



Product Code	Product	Pcs / Carton	Cartons / Pallet	Weight / Unit
ULT11EVRT450	Eaves Vent Rafter Tray 450mm	100	20	62g
ULT11EVRT600	Eaves Vent Rafter Tray 600mm	100	20	100g



Dry Fix

Ambi Dry Verge
Handed Dry Verge
Handed TLE Dry Verge
Dry Verge 500
6m Dry Fix Ridge & Hip Kit

FUN FACT!



Don & Low began as a small woven textile's manufacturer in Scotland, gradually expanding its operations and diversifying its production capabilities over the years.






Ambi Dry Verge

The Don & Low Ambi Dry Verge is designed to provide a mortar free and secure method of fixing concrete interlocking verge tiles while complying to BS5534. As it isn't handed, it can be fitted on both sides of the roof. Ambi Dry Verge ensures a consistent appearance that requires no maintenance. The system is available in five colours to blend in with the roof line and fits concrete interlocking tiles, between 260-355mm batten gauge and tested to BS8612.

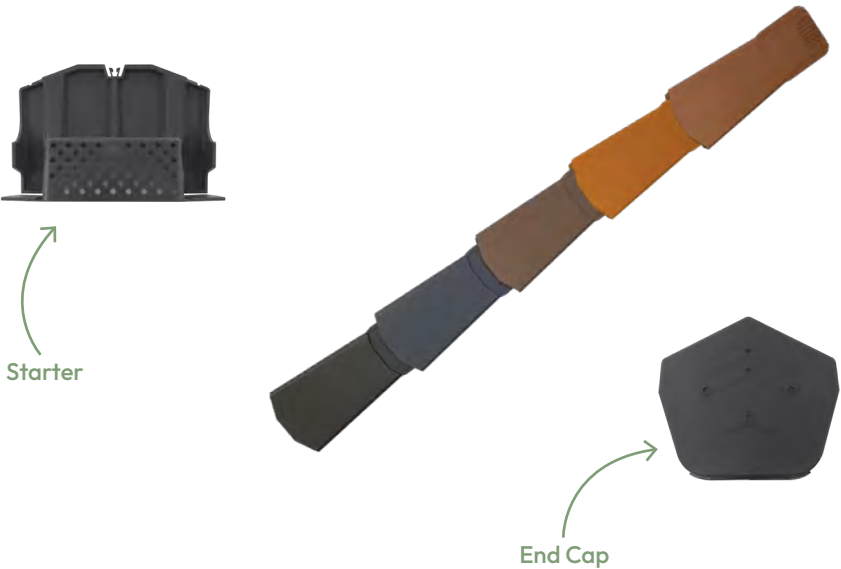

Product Code	Product	Colour	Pcs / Carton	Cartons / Pallet	Weight / Unit
DL2DVAGR	Ambi Dry Verge	Grey	50	20	185g
DL2DVABR	Ambi Dry Verge	Brown	50	20	185g
DL2DVATE	Ambi Dry Verge	Terracotta	50	20	185g
DL2DVABL	Ambi Dry Verge	Black	50	20	185g
DL23DVARE	Ambi Dry Verge	Red	50	20	185g
DL2DVASGR	Ambi Dry Verge Starter	Grey	50	40	49g
DL2DVASBR	Ambi Dry Verge Starter	Brown	50	40	49g
DL2DVASTE	Ambi Dry Verge Starter	Terracotta	50	40	49g
DL2DVASBL	Ambi Dry Verge Starter	Black	50	40	49g
DL2ECRGR	Dry Verge End Cap Round	Grey	50	20	140g
DL2ECRBR	Dry Verge End Cap Round	Brown	50	20	140g
DL2ECRTE	Dry Verge End Cap Round	Terracotta	50	20	140g
DL2ECRBL	Dry Verge End Cap Round	Black	50	20	140g
DL2ECRRE	Dry Verge End Cap Round	Red	50	20	140g
DL2ECAGR	Dry Verge End Cap Angled	Grey	50	20	140g
DL2ECABR	Dry Verge End Cap Angled	Brown	50	20	140g
DL2ECATE	Dry Verge End Cap Angled	Terracotta	50	20	140g
DL2ECABL	Dry Verge End Cap Angled	Black	50	20	140g
DL2ECARE	Dry Verge End Cap Angled	Red	50	20	140g

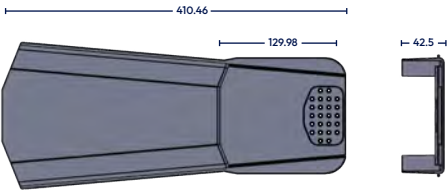

Dimensions



Handed Dry Verge

The Don & Low Handed Dry Verge is designed to provide a mortar free and secure method of fixing concrete interlocking verge tiles while complying to BS5534. It provides a consistent appearance that requires no maintenance. The system is available in five colours to blend in with the roof line and fits concrete interlocking tiles, between 260-360mm batten gauge and tested to BS8612.

Colour Palette

Black

Grey


Brown

Terracotta

Red



Product Code	Product	Colour	Pcs / Carton	Cartons / Pallet	Weight / Unit
DL2DVRHGR	Handed Dry Verge Right Hand	Grey	50	20	183g
DL2DVRHBR	Handed Dry Verge Right Hand	Brown	50	20	183g
DL2DVRHTE	Handed Dry Verge Right Hand	Terracotta	50	20	183g
DL2DVRHBL	Handed Dry Verge Right Hand	Black	50	20	183g
DL2DVRHRE	Handed Dry Verge Right Hand	Red	50	20	183g
DL2DVLHGR	Handed Dry Verge Left Hand	Grey	50	20	183g
DL2DVLHBR	Handed Dry Verge Left Hand	Brown	50	20	183g
DL2DVLHTE	Handed Dry Verge Left Hand	Terracotta	50	20	183g
DL2DVLHBL	Handed Dry Verge Left Hand	Black	50	20	183g
DL2DVLHRE	Handed Dry Verge Left Hand	Red	50	20	183g
DL2USGR	Ambi Dry Verge Starter	Grey	25	40	50g
DL2ECRGR	Dry Verge End Cap Round	Grey	40	20	140g
DL2ECRBR	Dry Verge End Cap Round	Brown	40	20	140g
DL2ECRTE	Dry Verge End Cap Round	Terracotta	40	20	140g
DL2ECRBL	Dry Verge End Cap Round	Black	40	20	140g
DL2ECRRE	Dry Verge End Cap Round	Red	40	20	140g
DL2ECAGR	Dry Verge End Cap Angled	Grey	40	20	140g
DL2ECABR	Dry Verge End Cap Angled	Brown	40	20	140g
DL2ECATE	Dry Verge End Cap Angled	Terracotta	40	20	140g
DL2ECABL	Dry Verge End Cap Angled	Black	40	20	140g
DL2ECARE	Dry Verge End Cap Angled	Red	40	20	140g

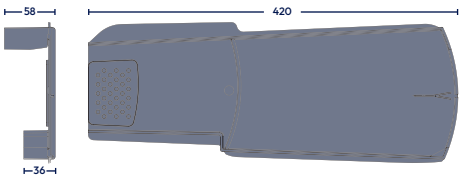


Dimensions




Handed TLE Dry Verge

The Don & Low TLE Handed Dry Verge is designed to provide a mortar free and secure method of fixing concrete interlocking verge tiles whilst complying to BS5534. It provides a consistent appearance that requires no maintenance. The system is available in two colours and fits concrete interlocking tiles, between 260-350mm batten gauge and tested to BS8612.

Colour Palette

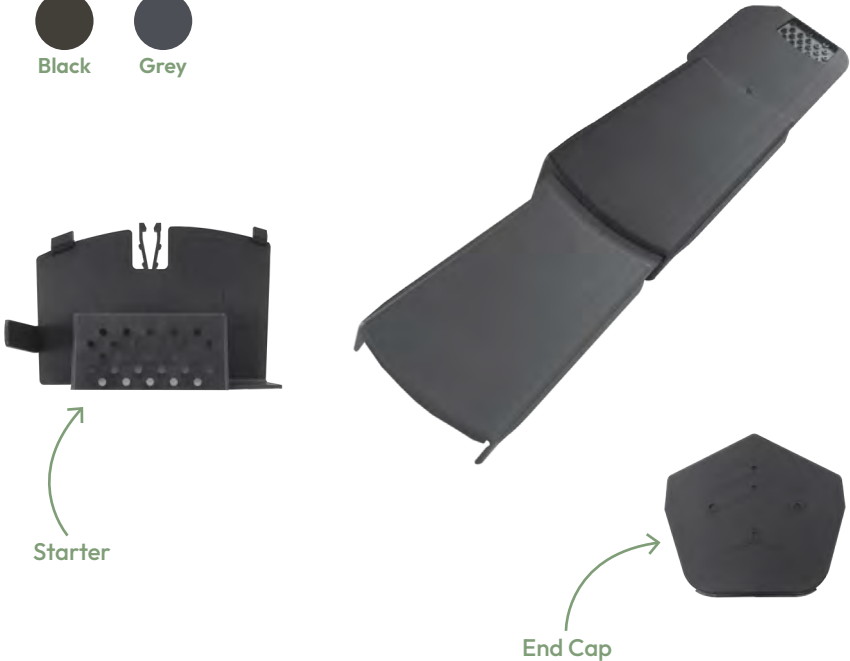

Product Code	Product	Colour	Pcs / Carton	Cartons / Pallet	Weight / Unit
DL2TLEVRHGR	Handed Dry TLE Verge Right Hand	Grey	50	20	162g
DL2TLEVRHBL	Handed Dry TLE Verge Right Hand	Black	50	20	162g
DL2TLEVLHGR	Handed Dry TLE Verge Left Hand	Grey	50	20	162g
DL2TLEVLHBL	Handed Dry TLE Verge Left Hand	Black	50	20	162g
DL2TLEVSRGR	Dry Verge TLE Starter Right	Grey	25	40	49g
DL2TLEVSRBL	Dry Verge TLE Starter Right	Black	25	40	49g
DL2TLEVSLGR	Dry Verge TLE Starter Left	Grey	25	40	49g
DL2TLEVSLBL	Dry Verge TLE Starter Left	Black	25	40	49g
DL2ECRGR	Dry Verge End Cap Round	Grey	40	20	140g
DL2ECRBL	Dry Verge End Cap Round	Black	40	20	140g
DL2ECAGR	Dry Verge End Cap Angled	Grey	40	20	140g
DL2ECABL	Dry Verge End Cap Angled	Black	40	20	140g

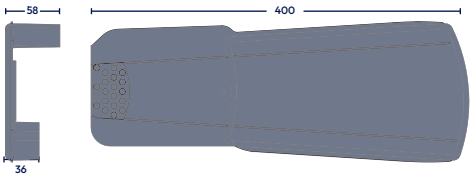

Dimensions



Dry Verge 500


The Don & Low Dry Verge 500 provides a mortar-free and secure method of fixing slate, plain and concrete interlocking verge tiles. As it isn't handed, it can be fitted on both sides of the roof and gives a continuous straight line appearance that needs no maintenance. The system complies to BS5534 and BS8612. It's available in three colours and designed to be either batten end fixed or retro fitted.

Colour Palette



Product Code	Product	Colour	Pcs / Carton	Cartons / Pallet	Weight / Unit
DL2UV500BL	Dry Verge 500	Black	36	20	305g
DL2UV500GR	Dry Verge 500	Grey	36	20	305g
DL2UV500BR	Dry Verge 500	Brown	36	20	305g
DL2UV500SGR	Dry Verge 500 Starter	Grey	25	40	31g
DL2UV500CGR	Dry Verge 500 Clips	Grey	100	40	20g
DL2ECRBL	Dry Verge End Cap Round	Black	40	20	140g
DL2ECRGR	Dry Verge End Cap Round	Grey	40	20	140g
DL2ECRBR	Dry Verge End Cap Round	Brown	40	20	140g
DL2ECABL	Dry Verge End Cap Angled	Black	40	20	140g
DL2ECAGR	Dry Verge End Cap Angled	Grey	40	20	140g
DL2ECABR	Dry Verge End Cap Angled	Brown	40	20	140g

Dimensions

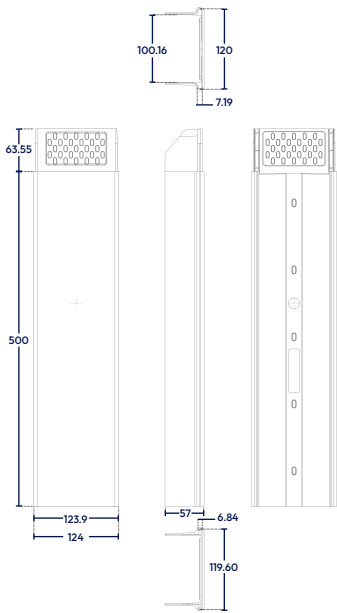

6m Dry Fix Ridge & Hip Kit

A universal dry ridge and hip system complying to BS5534 and BS5250 for ventilation, with effective airflow of 5,000mm² / 1m, suitable for most concrete and clay ridge and hip tiles.

It comes in a practical all-in-one kit, including:

- 1x Ridge and Hip Roll; 13x Ridge to Ridge Seals
- 13x Stainless Steel Screws and Washers (100mm)
- 13x Clamping Plates
- 10x Ridge Batten Strips to comply to BS8612



Product Code	Product	Pcs / Carton	Cartons / Pallet
DL2DR&H	6m Dry Ridge & Hip Kit	1	100
DL2DR7H300CK	300mm Conversion Kit	1	-
DLULTI2DRR	Dry Ridge Roll	1	-
DL2D390RR	Dry Ridge Roll 390mm	-	-
DL2DCRR	Dry Copper Ridge Roll	-	-
DL2DHT	1.2m Dry Hip Tray	10	100
DL2DRUP	Dry Ridge Union Pack	13	-
DL2DRSP	Dry Ridge Screw Pack (13no.)	50	-
DL2UCC50	Ulti-C Clip Pack (50no.)	50	48
DL2USS20:20	Ulti-C Clip 20:20 Pack Top & Tail (40no.)	50	48
DL2ULC	Ulti-Lead Clip Pack (50no.)	50	96
DL2UCP	Ulti-Clamping Plates Black (13no.)	50	96






Roof Vents

TLE Vent
Flat Vent
Double Pantile Vent
Double Roman Vent
15x9 Vent
Single Pantile Vent
Double Plain Tile Vent
Plain Tile Vent
10k Slate Vent
Slate Vent

FUN FACT!

More than 350 people are employed by **Don & Low** in the UK, while the company owns 47 registered patents and trademarks!

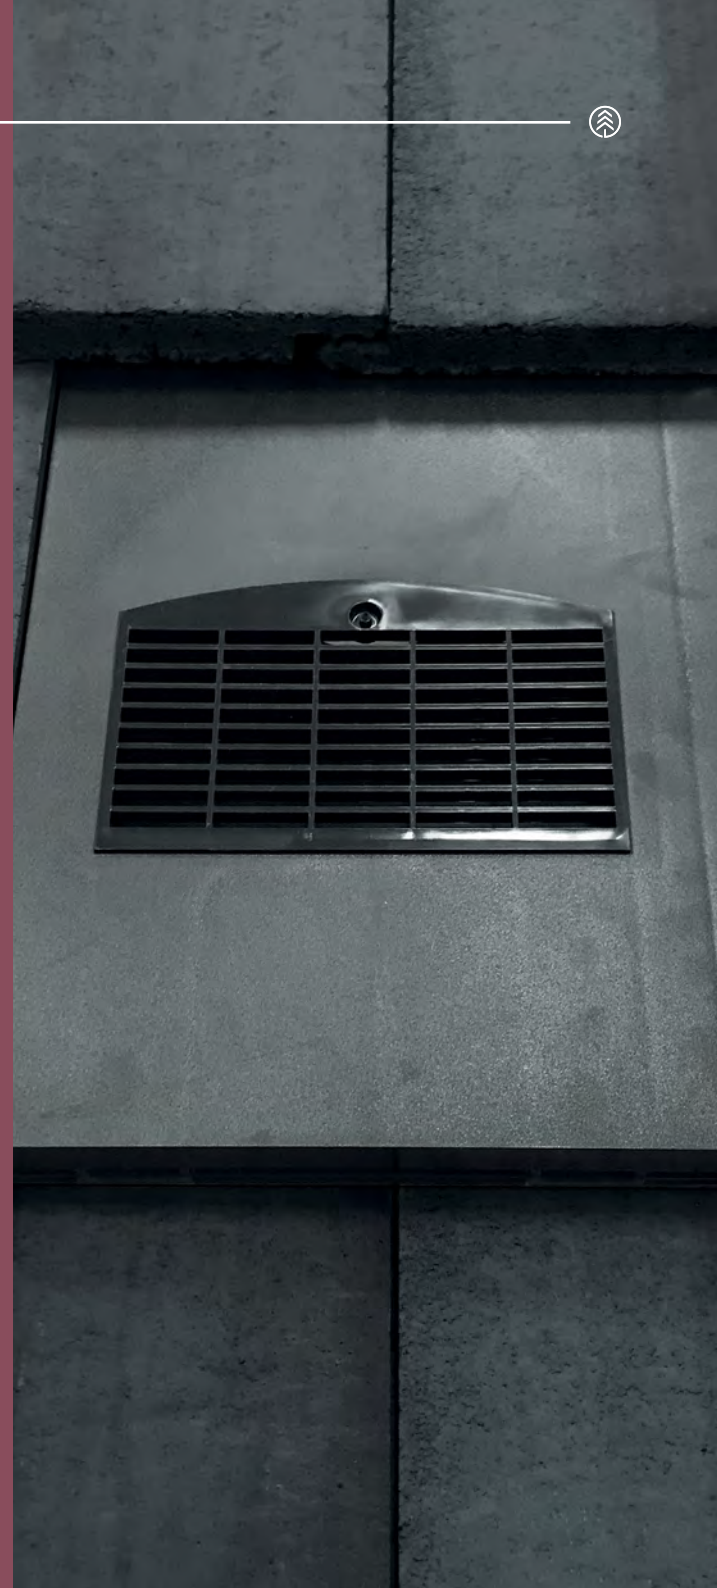

TLE Vent

The Thin Leading Edge (TLE) Vent is an in-line range designed for the TLE profile, suitable for the most popular concrete interlocking roof tiles with a minimum pitch of 20°. It can be used for high- and low-level roof space ventilation, providing a 10,000mm² airflow. Independently tested by the BRE for weather tightness and effective airflow, the TLE Tile Vent can be used for mechanical extraction when fitted with a Flexipipe DL3FP, with no adaptor required thanks to its integral downpipe.

British standards & regulations compliant

Tested by the BRE

No adaptor needed

Colour Palette



COMPATIBILITY	
Manufacturer	Profile
Breedon	Elite
Condron	Senior Slate
Marley	Edgemere
Quinn	Rathmore/Devenish
Russell	Galloway
Redland	Richmond/Saxon
Sandtoft	TLE
Sandtoft	Danum

Product Code	Product	Colour	Pcs / Carton	Cartons / Pallet	Weight / Unit
DL3TLEVGR	TLE Vent	Grey	10	15	783g
DL3TLEVBL	TLE Vent	Black	10	15	783g
DL3TLEVBR	TLE Vent	Brown	10	15	783g
DL3TLEVTE	TLE Vent	Terracotta	10	15	783g
DL3TLEVRE	TLE Vent	Red	10	15	783g
DL3FP	110mm Flexipipe	Black	10	80	225g

Flat Vent

The Don & Low Flat Vent is an in-line range designed for the Flat profile, suitable for the most popular concrete interlocking roof tiles with a minimum pitch of 20°. It can be used for high- and low-level roof space ventilation, providing a 10,000mm² airflow. Independently tested by the BRE for weather tightness and effective airflow, the Flat Vent can be used for mechanical extraction when fitted with a Flexipipe DL3FP, with no adaptor required thanks to its integral downpipe.

British standards & regulations compliant

Tested by the BRE

No adaptor needed

Colour Palette



COMPATIBILITY	
Manufacturer	Profile
Breedon	Flat
Condron	Slate Tile
Crest	Planum Flat / 2 Duo
Marley	Modern
Morrissey	Milford
Northstone	Donard / Penrose
Quinn	Western
Russell	Grampian
Redland	Mini Stonewold
Sandtoft	Calderdale

Product Code	Product	Colour	Pcs / Carton	Cartons / Pallet	Weight / Unit
DL3FVGR	Flat Vent	Grey	10	15	811g
DL3FVBL	Flat Vent	Black	10	15	811g
DL3FVBR	Flat Vent	Brown	10	15	811g
DL3FVTE	Flat Vent	Terracotta	10	15	811g
DL3FVRE	Flat Vent	Red	10	15	811g
DL3FP	110mm Flexipipe	Black	10	80	225g

Double Pantile Vent

The Don & Low Double Pantile Vent is an in-line range designed for the Double Pantile profile, suitable for the most popular concrete interlocking roof tiles with a minimum pitch of 20°. It can be used for high- and low-level roof space ventilation, providing a 10,000mm² airflow. Independently tested by the BRE for weather tightness and effective airflow, the Double Pantile Vent can be used for mechanical extraction when fitted with a Flexipipe DL3FP, with no adaptor required thanks to its integral downpipe.

British standards & regulations compliant

Tested by the BRE

No adaptor needed

Colour Palette



Back



COMPATIBILITY	
Manufacturer	Profile
Condron	Pantile
Crest	Double Pantile
Marley	Mendip
Morrissey	Rockford
Quinn	Locherne
Russell	Pennine
Redland	Grovebury
Sandtoft	Double Pantile

Product Code	Product	Colour	Pcs / Carton	Cartons / Pallet	Weight / Unit
DL3DPVGR	Double Pantile Vent	Grey	10	12	909g
DL3DPVBL	Double Pantile Vent	Black	10	12	909g
DL3DPVBR	Double Pantile Vent	Brown	10	12	909g
DL3DPVTE	Double Pantile Vent	Terracotta	10	12	909g
DL3DPVRE	Double Pantile Vent	Red	10	12	909g
DL3FP	110mm Flexipipe	Black	10	80	225g

Double Roman Vent

The Don & Low Double Roman Vent is an in-line range designed for the Double Roman profile, suitable for the most popular concrete interlocking roof tiles with a minimum pitch of 20°. It can be used for high- and low-level roof space ventilation, providing a 10,000mm² airflow. Independently tested by the BRE for weather tightness and effective airflow, the Double Roman Vent can be used for mechanical extraction when fitted with a Flexipipe DL3FP, with no adaptor required thanks to its integral downpipe.

British standards & regulations compliant

Tested by the BRE

No adaptor needed

Colour Palette



Back



COMPATIBILITY	
Manufacturer	Profile
Breedon	Double Top
Condron	DR Tile
Crest	Double Roman
Marley	Double Roman
Russell	Double Roman
Redland	Double Roman
Sandtoft	Double Roman

Product Code	Product	Colour	Pcs / Carton	Cartons / Pallet	Weight / Unit
DL3DRVGR	Double Roman Vent	Grey	10	12	893g
DL3DRVBL	Double Roman Vent	Black	10	12	893g
DL3DRVBR	Double Roman Vent	Brown	10	12	893g
DL3DRVTE	Double Roman Vent	Terracotta	10	12	893g
DL3DRVRE	Double Roman Vent	Red	10	12	893g
DL3FP	110mm Flexipipe	Black	10	80	225g



Square Top Vent

The Don & Low Square Top Vent is an in-line range designed for the Square Top profile, suitable for the most popular concrete interlocking roof tiles with a minimum pitch of 20°. It can be used for high- and low-level roof space ventilation, providing a 10,000mm² airflow. Independently tested by the BRE for weather tightness and effective airflow, the Flat Vent can be used for mechanical extraction when fitted with a Flexipipe DL3FP, with no adaptor required thanks to its integral downpipe. It has a cut out feature, where the middle profile is wider.


British standards & regulations compliant

Tested by the BRE No adaptor needed

Colour Palette



Back

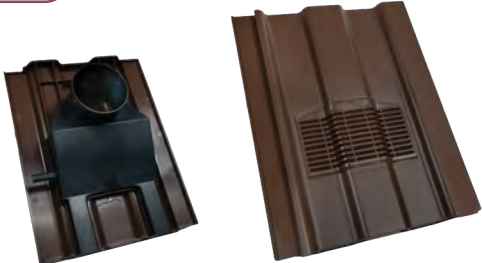

Product Code	Product	Colour	Pcs / Carton	Cartons / Pallet	Weight / Unit
DL3STLVGR	Square Top Large Vent	Grey	10	12	906g
DL3STLVBL	Square Top Large Vent	Black	10	12	906g
DL3STLVBR	Square Top Large Vent	Brown	10	12	906g
DL3STLVTE	Square Top Large Vent	Terracotta	10	12	906g
DL3STLVRE	Square Top Large Vent	Red	10	12	906g
DL3FP	110mm Flexipipe	Black	10	80	225g

15x9 Vent

The Don & Low 15x9 Vent is an in-line range designed for the 15x9 profile, suitable for the most popular concrete interlocking roof tiles with a minimum pitch of 20°. It can be used for high- and low-level roof space ventilation, providing a 10,000mm² airflow. Independently tested by the BRE for weather tightness and effective airflow, the 15x9 Vent can be used for mechanical extraction when fitted with a Flexipipe DL3FP, with no adaptor required thanks to its integral downpipe. It has a cut out feature, where the middle profile is wider.

British standards & regulations compliant

Tested by the BRE No adaptor needed

Colour Palette



Back



Product Code	Product	Colour	Pcs / Carton	Cartons / Pallet	Weight / Unit
D315x9VGR	15x9 Vent	Grey	10	12	854g
DL315x9VBR	15x9 Vent	Brown	10	12	854g
DL315x9VTE	15x9 Vent	Terracotta	10	12	854g
DL315x9VRE	15x9 Vent	Red	10	12	854g
DL3FP	110mm Flexipipe	Black	10	80	225g



Single Pantile Vent

The Don & Low Single Pantile Vent is an in-line range designed for the Single Pantile profile, suitable for the most popular concrete interlocking roof tiles with a minimum pitch of 20°. It can be used for high- and low-level roof space ventilation, providing a 6,000mm² airflow. Independently tested by the BRE for weather tightness and effective airflow, the Single Pantile Vent can be used for mechanical extraction when fitted with a Flexipipe DL3FP, with no adaptor required thanks to its integral downpipe. It has a cut out feature to allow a more in-line fit on the lower course tile.

COMPATIBILITY	
Manufacturer	Profile
Forticrete	Centurion/Senator
Marley	Anglia
Northstone	Centurion
Redland	Norfolk Pantile
Sandtoft	Shire

British standards & regulations compliant

Tested by the BRE

No adaptor needed

Colour Palette



Product Code	Product	Colour	Pcs / Carton	Cartons / Pallet	Weight / Unit
DL3SPVGR	Single Pantile Vent	Grey	10	12	514g
DL3SPVBR	Single Pantile Vent	Brown	10	12	514g
DL3SPVTE	Single Pantile Vent	Terracotta	10	12	514g
DL3SPVRE	Single Pantile Vent	Red	10	12	514g
DL3FP	110mm Flexipipe	Black	10	80	225g

Double Plain Tile Vent

The Don & Low Double Plain Tile Vent is an in-line range designed for the Double Plain profile, suitable for the most popular concrete interlocking roof tiles with a minimum pitch of 22.5°. It can be used for high- and low-level roof space ventilation, providing a 7,500mm² airflow. Independently tested by the BRE for weather tightness and effective airflow, the Double Plain Tile Vent can be used for mechanical extraction when fitted with a Flexipipe DL3FP, with no adaptor required thanks to its integral downpipe.

COMPATIBILITY	
Manufacturer	Profile
Forticrete	Gemini
Marley	Ashmore
Northstone	Gemini
Redland	Duo Plain

British standards & regulations compliant

Tested by the BRE

No adaptor needed

Colour Palette



Product Code	Product	Colour	Pcs / Carton	Cartons / Pallet	Weight / Unit
DLDPTVGR	Double Plain Vent	Grey	10	12	510g
DLDPTVBR	Double Plain Vent	Brown	10	12	510g
DLDPTVTE	Double Plain Vent	Terracotta	10	12	510g
DLDPTVRE	Double Plain Vent	Red	10	12	510g
DL3FP	110mm Flexipipe	Black	10	80	225g

TX[®] Plain Tile Vent

The Don & Low Plain Tile Vent is suitable for clay and concrete plain tiles with a minimum pitch of 35°. It allows direct ventilation to the roof space while maintaining the aesthetic appeal of a plain-tiled roof. Specifically engineered to match the appearance of standard plain roof tiles, the Plain Tile Vent provides a virtually invisible ventilation solution with a 6,000mm² airflow that preserves the roof's original design. It integrates seamlessly with standard roof tiles, making them easy to install without the need for specialised equipment or extensive modifications. The Plain Tile Vent can be used for mechanical extraction when fitted with adaptor and flexipipe.

British standards & regulations compliant

Tested by the BRE

Colour Palette



Product Code	Product	Colour	Pcs / Carton	Cartons / Pallet	Weight / Unit
DL3PTVGR	Plain Tile Vent	Grey	10	21	605g
DL3PTVBR	Plain Tile Vent	Brown	10	21	605g
DL3PTVRE	Plain Tile Vent	Red	10	21	605g
DL3PTVTE	Plain Tile Vent	Terracotta	10	21	605g
DL3PTVA	Plain Tile Vent	-	10	21	425g
DL3PTVTX	TX [®] Plain Tile Vent	-	10	21	605g
DL3FP	110mm Flexipipe	-	10	80	225g
DL3PTVA	Adaptor	-	10	21	425g



Before



After



TX[®] Plain Tile Vent

The TX[®] version creating a perfectly natural in-line appearance by allowing tile vent slips to be adhered





10k Slate Vent

The Don & Low 10k Slate Vent is suitable for most fibre cement and natural slate with a minimum pitch of 22.5°. It has a 10,000mm² airflow while maintaining the aesthetic appeal of slate, making it suitable for various roofing projects. The 10k Slate Vent allows essential moisture and heat regulation within roof spaces through natural convection and wind movement to push warm air from the roof space. It can be used for mechanical extraction when fitted with a Flexipipe DL3FP, with no adaptor required thanks to its integral downpipe. If penetration through the roof membrane is needed, an adaptor is also available.

British standards & regulations compliant

No adaptor needed

Colour Palette



Product Code	Product	Colour	Pcs / Carton	Cartons / Pallet	Weight / Unit
DL3SVBL	10k Slate Vent	Black	10	21	890g
DL3SVGR	10k Slate Vent	Grey	10	21	890g
DL3SVA	Slate Vent Adaptor	Black	10	21	53g
DL3FP	110mm Flexipipe	Black	10	80	225g

TX[®] Slate Vent

The Don & Low TX[®] Slate Vent is suitable for fixing with most fibre cement and natural slate, with a minimum pitch of 22.5°. It has a 10,000mm² airflow while maintaining the aesthetic appeal of slate. The TX[®] Slate Vent has been expertly designed to suit slates in widths of 300mm, 250mm and 200mm. It can be used for mechanical extraction when fitted with a Flexipipe DL3FP, with no adaptor required thanks to its integral downpipe. If penetration through the roof membrane is needed, an adaptor is also available.

British standards & regulations compliant

No adaptor needed

Colour Palette



Product Code	Product	Colour	Pcs / Carton	Cartons / Pallet	Weight / Unit
DL3ULSVBL	TX [®] Slate Vent	Black	10	21	618g
DL3ULSVGR	TX [®] Slate Vent	Grey	10	21	618g
DL3FP	110mm Flexipipe	Black	10	80	225g

GRP

GRP Valleys & Bonding Strips

FUN FACT!

Headquartered in Forfar, **Don & Low** manufactures over 400 products, including the market-leading construction membranes **Roofshield®**, **Frameshield®**, **Reflectashield®** and **VapourTX Thermo®**.





GRP Valleys & Bonding Strips

GRP Valleys provide a durable, long-lasting, and lightweight alternative to traditional lead and zinc valleys.

The Bonding Strip is an excellent option for creating a watertight junction above the party wall between different roof finishes when re-roofing.

The Continuous Soaker is an effective solution for side abutment applications, guaranteeing the water tightness of this roof detail.



Product Code	Product	Colour	Pcs / Carton	Pallet Size
Dry Fix Valley Troughs				
DL4DVC	Dry Valley Clip (Box of 100)	Black	100 Per Carton	
DL4DVS1	3m Dry Valley Slate	Black	5 Per Pack	300
DL4DVT1	3m Dry Valley Tile	Black	5 Per Pack	300
DL4DVLPT1	3m Dry Valley Low Profile Tile	Black	5 Per Pack	300
DL4OBDVLPT1	Over Batten 3m Dry Valley Low Profile Tile	Black	5 Per Pack	200
DL4OBDVT1	Over Batten 3m Dry Valley Tile	Black	5 Per Pack	200
DL4SDVT1	3m Secret Dry Valley Trough	Black	5 Per Pack	200
Open Valley Troughs				
DL4SVT	3m x 330mm Slate Valley Trough	Black	10 Per Pack	500
DL4RP3	3m x 380mm Valley Trough	Black	10 Per Pack	500
DL4SSVT	3m x 360mm Scottish Slate Valley Trough	Black	10 Per Pack	500
Dry Fix Bonding Gutter / Bonding Gutter				
DL4BG	Bonding Gutter 3m x 225mm	Black	10 Per Pack	500
DL4DBG1	Dry Fix Bonding Gutter - 70mm	Black	5 Per Pack	500
DL4DBG2	Dry Fix Bonding Gutter - 100mm	Black	5 Per Pack	500



Built on Tradition,
Driven by Innovation
Since 1792

Construction Technical Services

Advice You Can Build On

0808 169 4444

membranes@donlow.co.uk



www.donlow.co.uk

Follow us on:

