

Don & Low Roofing Accessories

Double Plain Tile Vent

Datasheet

The Don & Low Double Plain Tile Vent has a 6,000mm² airflow and can be laid down to 20° roof pitch. Available in four colours.



Roof Ventilation	
Airflow	Space
5,000mm ²	1.5m Intervals at Ridge
10,000mm ²	0.75m Intervals at Eaves

Guidelines

To be fitted whilst laying the roof (can be retro fitted as well). The roof membrane needs to be cut to allow penetration into roof space. Cut an "X" into the membrane, folding back all 4 tabs, with the top envelope tab folded back and fixed over the top batten. Can be used with Flexipipe DL3FP if connection required.

Specifications		
	Double Plain Tile Vent	Flexipipe
Product Code	DL3DPTV	DL3FP
Free Airflow	6,000mm ²	-
Weight	510g	225g
Dimensions	330x268mm	110mm
Material	Polypropylene (PP)	
Pcs / Carton	10	10
Cartons / Pallet	12	80
Manufacturing Process	Rotation	
Colours	Grey, Brown, Red, Terracotta	Black
Regulations / Certifications	Compliant with All Relevant British Standards and Regulations	

ISSUE DATE: DECEMBER 2025

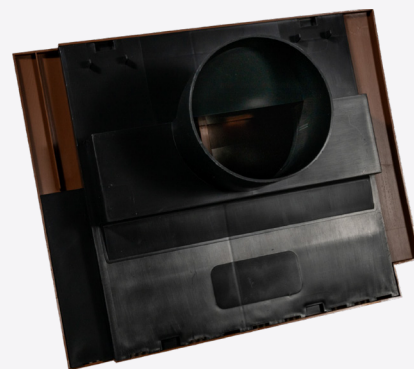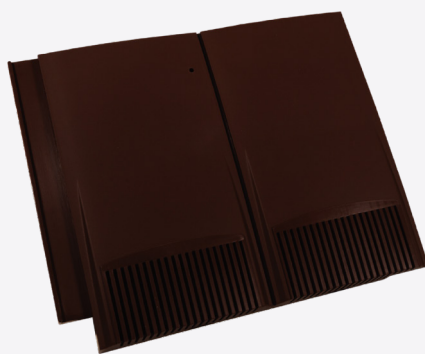

Construction Technical Services

0808 169 4444

Don & Low Ltd, Glamis Road, Forfar, Angus, DD8 1FR, Scotland, UK
Tel: +44(0)1307 452200 Fax: +44 (0)1307 452201

Don & Low assumes no liability for written errors within this document.

15 YEAR
WARRANTY

All products are covered by 15 year Durability Warranty. Terms and conditions apply.

MADE IN THE UK 

All plastic products are made in the UK.